




LUX PROFFS  
B5010/B5020

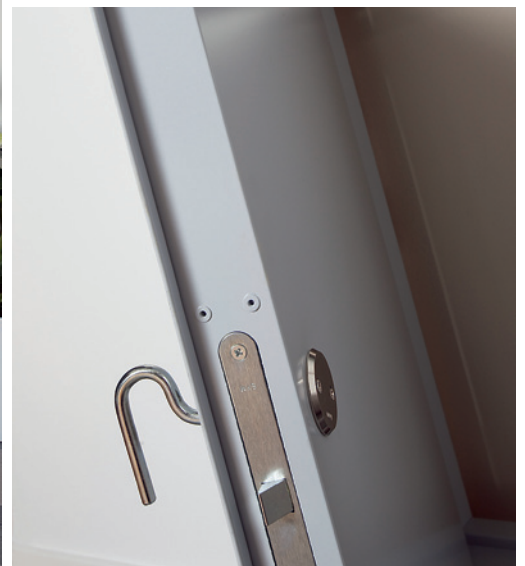

## Wall hatch for public environments.

The LUX PROFFS wall hatch is made of steel and complies with fire standard EI60 requirements. This makes these hatches ideal for multi-home buildings, schools, industrial buildings, hospitals and other public buildings. Available as models B5010 or B5020, depending on the opening size required. The strong wall hatch can also be custom made and be left or right side hung.

A product from



<i>Product</i>	<i>Frame outer measurements (mm)</i>	<i>Inner measurements (mm)</i>	<i>Insulation</i>	<i>U-value* (W/m<sup>2</sup>°C)</i>	<i>Fire standard</i>
LUX PROFFS B5010	570 x 800	490 x 720	50mm rockwool	0.61	EI60
LUX PROFFS B5020	570 x 1100	490 x 1020	50mm rockwool	0.61	EI60

*The measurements of the opening in the ceiling construction are 15-20mm larger than the specified outer measurements.*

\*U-value determination carried out by SP Technical Research Institute of Sweden.

### **LUX PROFFS wall hatch**

Supplied with grey powder coated 1.25mm steel on both sides and liner forming profile. Insulation of 50mm rockwool in compliance with fire standard EI60. ASSA 565 lock case. The lock is prepared for a cylinder lock and is supplied with a 120mm key.

