
| | |
|--------|---------------|
| SAN 70 | 540 x 790 mm |
| SAN 70 | 580 x 1100 mm |

Casing:

| <u>outer size</u> | <u>inner size</u> |
|-------------------|-------------------|
| 540 x 790 mm | 484 x 742 mm |
| 580 x 1100 mm | 524 x 1052 mm |

Timber casing has:

| | |
|--------------------------------|------------|
| Case gable (on the hinge side) | 32 x 92 mm |
| Other sides | 24 x 92 mm |

Hatch:

| | |
|-------------------|--------------------------------------|
| Frame | timber, 69 x 45 mm |
| Board | 3,2 mm on both sides |
| Insulation | 70 mm polystyrene |
| Insulation factor | 0,40 W/m ² C ^o |

Surface treatment:

Untreated. Can be painted in white-gray finish against the price extension.

Fire rate :

Unrated


Locking:

There are two locking systems used depending on the size of the wall hatch:

| | |
|--------------------|--|
| SAN 70 540x790 mm | catch |
| SAN 70 580x1100 mm | espagnolette, 450 mm long with the rounded ends. |
| Key/handle | round metal, diameter 9 mm, length 120 mm |
| Diameter | 9 mm |
| Measurement | square 7-8 mm. |

Sealing:

EPDM rubber seal is mounted between the casing and the trap door.

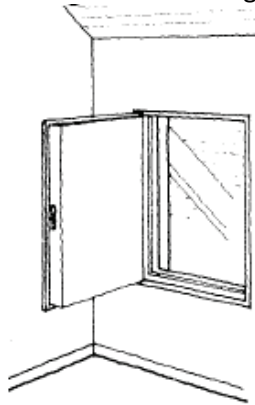

Övrigt:

The wall hatch has the hinges placed against each other, which allows to place the door either on the left or right side.

The hinges and lock are placed on the longer side of the hatch.

Note:

It is possible to manufacture the wall hatches with non-standard size within the limits: width 450 – 900 mm, height 495 – 1400 mm

Weight:***product******weight******number per pallet***

SAN70 540x790

8,4 kg

34

SAN70 580x1100

12,1 kg

17